


Grade E Rotary Hose

Specification Sheet

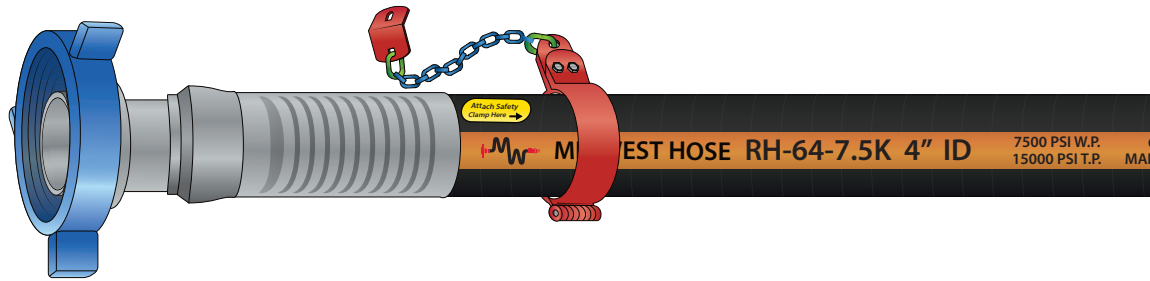

Tube Nitrile

Reinforcement 6 or 8 steel wire spiral layers

Cover Neoprene/PVC (PVC improves ozone and ageing resistance)

Grade E								
	ID	OD	Max WP	Test Pressure	Bend Radius at WP	Bend Radius in Storage	Weight	coupling
	inch	inch	psi	psi	inch	inch	lbs./ft.	
	RH-48-7.5K	3	5.25	7,500	11,250	30	18.7	60
	RH-56-7.5K	3-1/2	5.75				21.0	70
	RH-64-7.5K	4	6.63				30.4	85

Designed for mud delivery, mud jumper, motion compensator, decoking and water injection operations on a drilling rig. Used as a flexible connection (instead of pipe) between the standpipe and swivel (rotary) or between the pump and standpipe (vibrator) for pumping mud in drilling and exploration work. Can handle higher flow rates than Grade D.

Certifications API 7K-0060
Max Length 150 feet
Min Burst Requirement 18,750 psi
Inspected
Proof tested to API requirements

